

ENABLE MySurveillix CLOUD MONITORING

When starting the EHV for the first time, the MySurveillix window will open first. To enable MySurveillix on your recorder during the initial configuration:

1. Click ENABLE MYSURVEILLIX NOW.
2. Log in using the default admin user account. (username: admin, password: <blank>)
3. Set the DAILY UPDATE TIME.
4. Click SEND to send a test report to MySurveillix.
5. Click SAVE to save your settings.

If you did not enable MySurveillix during the initial system configuration, you can choose to enable it at any time. To enable MySurveillix on your recorder after the initial configuration:

1. Click SETUP and log in with the Admin user.
2. Go to NETWORK > MYSURVEILLIX SETUP.
3. Set ENABLE MYSURVEILLIX to ON.
4. Set the DAILY UPDATE TIME.
5. Click SEND to send a test report to MySurveillix.
6. Click SAVE to save your settings.

QUICK BACKUP IN SEARCH MODE

You can easily archive video while watching a video playback.

In the search mode:

1. Press the BACKUP button on the front panel to set the Start time. You will see PRESS BACKUP BUTTON TO SET END TIME at the top of the playback monitor.
2. Continue video playback until you reach the end of the desired clip.
3. Press the BACKUP button again to set the end time.
4. In the backup menu window, select the backup media (USB thumb drive), and start the backup.

FUNCTION BUTTONS



SETUP Open the system setup menu.



SEARCH Open the Search Menu.



DISPLAY Change the display mode. Display switches in the following order when the DISPLAY key is pressed successively: (Single > 4 > 9 > 16 > PiP).



BACKUP Opens the Export menu.



SEQ Starts the Sequence function.



REPLAY Starts playing last recorded video (10sec from current time).

DIRECTIONAL BUTTONS



PTZ Move the camera view point up.



PTZ Move the camera view point to the right.
Search Play recorded videos. When pressed successively, the search jumps forward in time by 30 minute increments.

Search/Pause Step forward one frame.



PTZ Move the camera view point up.



PTZ Move the camera view point to the left.
Search Play recorded videos in reverse. When pressed successively, the search jumps back in time by 30 minute increments.

Search/Pause Step backward one frame.

surveillix

EHV Digital Video Recorder

QUICK START GUIDE



LOGGING IN FOR THE FIRST TIME

DVR User ID: admin
Password: <none>

POWER BUTTON




Live Open Shutdown/Reboot screen.

ENTER BUTTON



Setup Input data, and make selections.

16 channel EHV shown

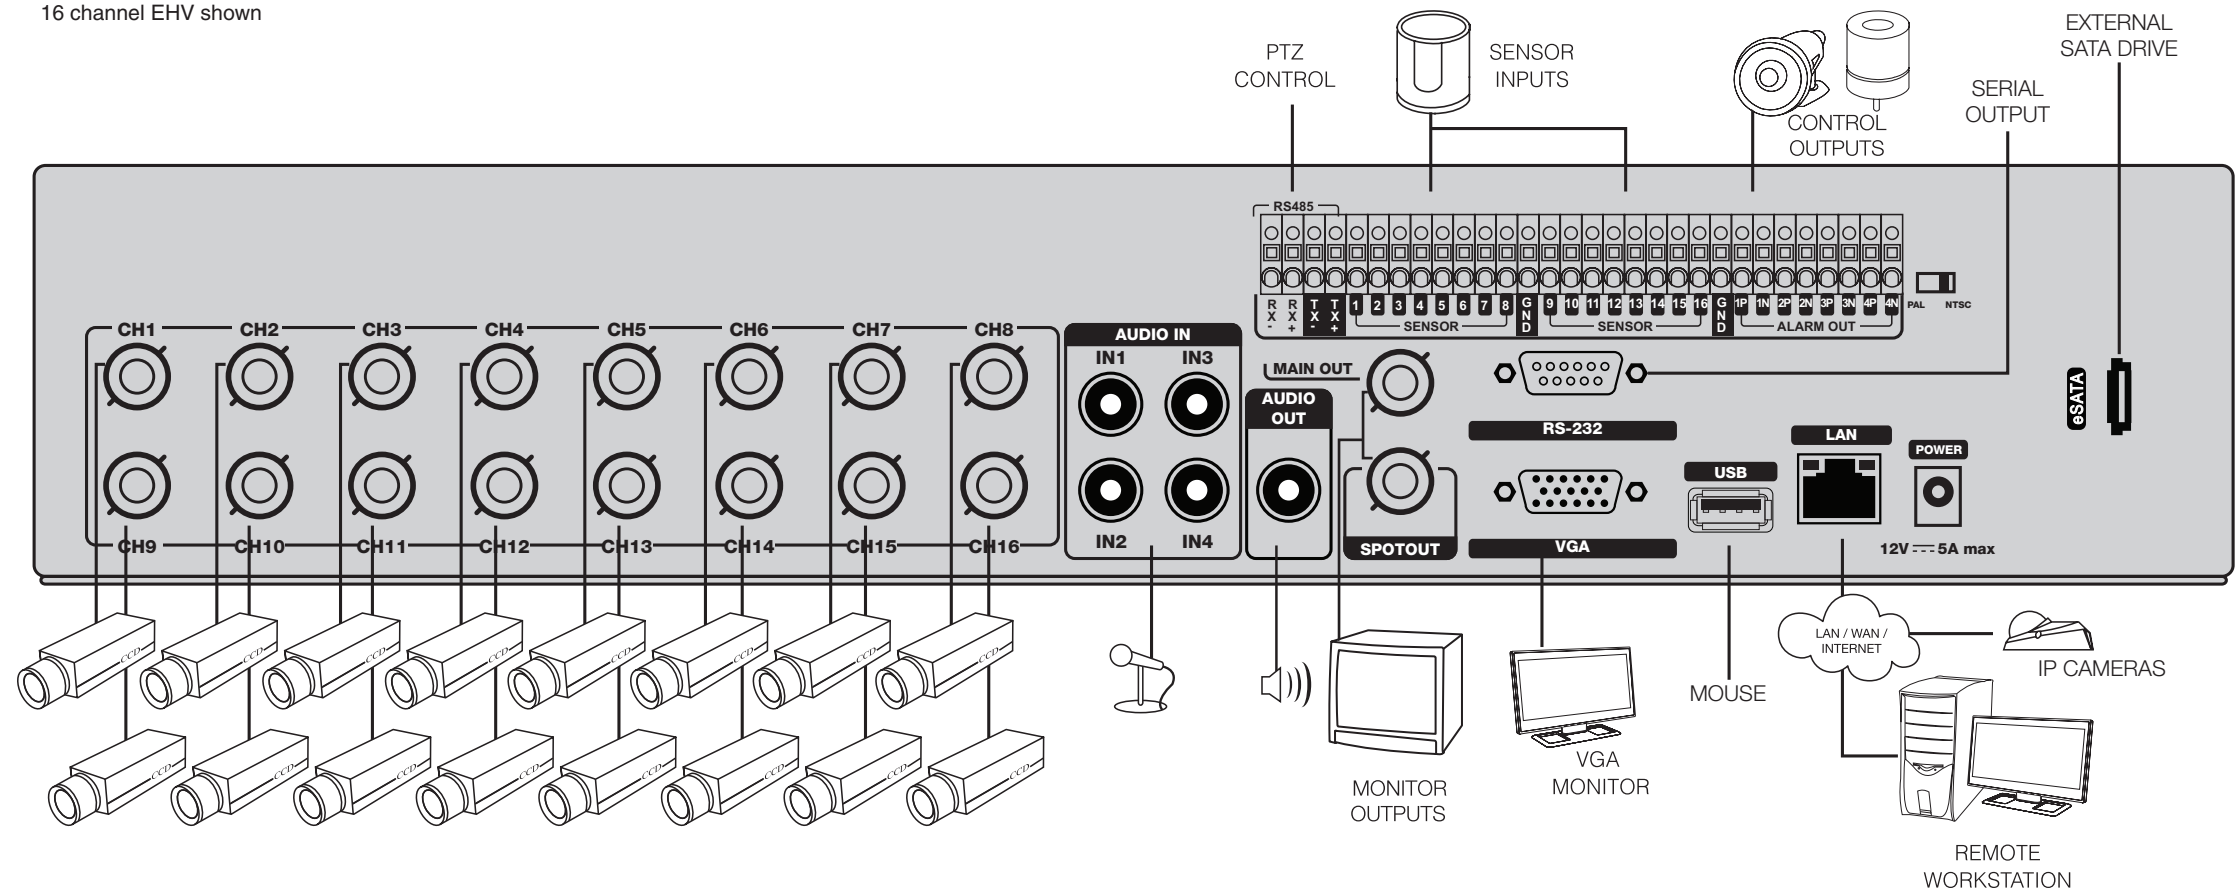

QUICK INSTALLATION

1. Connect cameras to video inputs, and if using, connect PTZ camera control lines to RS485 connector.
2. Connect the main monitor to the VGA monitor output or main video output - MAIN OUT.
3. Connect analog monitors to looping video outputs. (optional)
4. Connect the monitor to the SPOT video output. (optional)
5. Connect sensors to alarm signal inputs. (optional)

6. Connect alarm devices such as buzzers to alarm signal outputs. (optional)
7. Connect a speaker and microphone to the audio input and output. (optional)
8. Connect a network cable to the network port.
9. Power on all the connected equipment.
10. Connect the power cord to the DVR.
11. Add network cameras. (optional)

©2012 Surveillix DVR Support Center All rights reserved. All products and names mentioned are the property of their respective owners. While Surveillix has made every effort at the time of publication to ensure the accuracy of the information provided herein, product specifications, configurations, prices, system components, and options availability are all subject to change without notice.

CONFIGURING THE RECORDER

When you start the EHV recorder for the first time, you need to configure the system settings to match your location and time and ensure proper indexing of your recorded video. Go to SETUP > SYSTEM CONFIGURATION to adjust the following settings:

VIDEO FORMAT: NTSC/PAL

DATE FORMAT: ASIA (YYYY/MM/DD), US (MM/DD/YYYY) and EURO (DD/MM/YYYY).

DATE: Specify the current date.

TIME: Specify the current time.

TIME ZONE: Set the local time zone.

USE DST: Select to use DST(Daylight Saving Time), turn on this toggle option.

HOW TO USE IR REMOTE CONTROLLER

When more than one EHV DVR is installed in the same location, use one remote controller to control multiple DVRs. To control multiple DVRs, you must change the remote controller ID to match the DVR ID of the DVR.

Follow the instructions below to change the remote controller ID.

On the DVR

1. Go to SYSTEM > SYSTEM CONFIGURATION.
2. Enter the desired DVR ID number.

On the Remote Controller

3. Press and hold the ID button on the remote controller and enter the desired DVR ID number to operate the corresponding DVR.

Note The REMOTE ID must be input as two numbers on the remote controller. Therefore you should input 00 for the REMOTE ID 0 and input 01 for 1.

Technical Support
(877) 855-1349 • www.toshibasecurity.com

surveillix