

## ENABLE MYSURVEILLIX

When starting the recorder for the first time, the MySurveillix window will open first. To enable MySurveillix during the initial configuration, follow these instructions.

1. Click ENABLE MYSURVEILLIX NOW.
2. Log in using th admin user account (default username: admin, password: 1234).
3. Set the CUSTOM DAY/NIGHT TIME.
4. Click SEND to send a test report to MySurveillix.
5. To send alarm events to MySurveillix, set SEND ALARM EVENTS INSTANTLY to ON.
6. To send active updates to MySurveillix every 5 minutes, set HEARTBEAT to ON.
7. Click SAVE to save your settings.

**Note:** To enable MySurveillix at any time after the initial configuration, go to NETWORK > MYSURVEILLIX SETUP and then set ENABLE MYSURVEILLIX to ON.

## CHANGE THE SCREEN DISPLAY

Change the screen display while in Live mode.

- Full Screen Display  
Double-click your desired camera channel for full screen display.
- Divided Screen Display  
Click a screen division icon on the hover menu to show multilpe cameras at once.
- Change the Displayed Channels  
Click the camera channel numbers on the hover menu to change displayed channels. You can view multiple channels at once by clicking a channel number, and then clicking a screen division icon to view the other camera channels within that screen division.

## SEARCH RECORDED VIDEO WITH EXPRESS SEARCH

1. On the hover menu, click MENU, and then click SEARCH.
2. Click EXPRESS SEARCH.
3. Select a date and time to view. Click MONTH and YEAR for more date options. Highlighted time blocks represent recorded video.
4. Select a time by clickin on the time line box. Click HOUR to toggle between Hour and Minute view. The highlighted blocks represent periods of recorded video.
5. Use the arrow keys to move the bar across the displayed grid to select the search time. Highlighted time blocks represent recorded video.
6. Select PLAY.












## SET UP RECORDING

1. Click MENU on the hover menu, and then click SETUP.
2. Click RECORD, and then click RECORD SETUP.
3. Select the desired IPS for each channel.
4. Click SCHEDULE, and then select the channels to set a Recording Schedule.
5. Select your desired RECORDING MODE for this schedule.
6. Select your desired days and times to record.
7. Click SAVE to save your settings.





## SCREEN ICONS

In Live mode, icons or messages on the screen indicate the system mode or status.

Right-upper corner on each CH screen

	<b>Continuous</b>	Continuous Recording
	<b>Motion</b>	Motion Detection Recording
	<b>Sensor</b>	Sensor Activated Recording
	<b>Continuous + Motion</b>	Continuous + Motion Detection Recording
	<b>Continuous + Sensor</b>	Continuous + Sensor Activated Recording
	<b>Motion Detection + Sensor Activated</b>	Motion Detection + Sensor Activated Recording
	<b>Emergency</b>	Emergency Recording
	<b>Sensor Activated</b>	Sensor Activated
	<b>Motion Detected</b>	Motion Detected
	<b>Audio</b>	Audio Channel
	<b>PTZ</b>	PTZ Camera

Right-bottom corner on full screen.

	<b>No HDD</b>	No Hard Disk Drive (HDD), Smart Alarm, and HDD Failure
	<b>Emergency</b>	Using Emergency Recording
	<b>PTZ</b>	Using PTZ
	<b>Sequence</b>	Showing Sequence Mode

## MANUAL BACKUP

1. Click MENU on the hover menu, and then click EXPORT.
2. Insert a USB device.
3. Click SCAN to locate the device.
4. Select your desired CAMERAs and the FROM and TO time for the backup.
5. Click ESTIMATE to display the estimated file size and free space available.
6. Select EXPORT VIEWER to add the Export Viewer to the backup file.
7. Click EXPORT.

## QUICK BACKUP

1. Insert a USB device.
2. Perform a Search to locate YOUR desired video.
3. Press BACKUP at the beginning of the desired clip.
4. Press BACKUP again at the end of the desired clip.
5. Confirm the Backup settings.
6. Click EXPORT to start the backup.

## PLAY BACKUP FILE ON A PC

1. Insert a USB device into your client PC.
2. Navigate to the backup files on the USB device.
3. Double-click the MultiBackupPlayer application.
4. Click OPEN to locate the desired backup file saved by Date.

# surveillix


9740 Irvine Blvd.  
Irvine, CA 92618  
1-877-855-1349

Copyright ©2014 TAIS. All Rights Reserved. Information contained in this document is subject to change without prior notice. TAIS does its best to provide accurate information but cannot be held responsible for typos or mistakes.

# surveillix

## Embedded Analog Recorder EAV Series

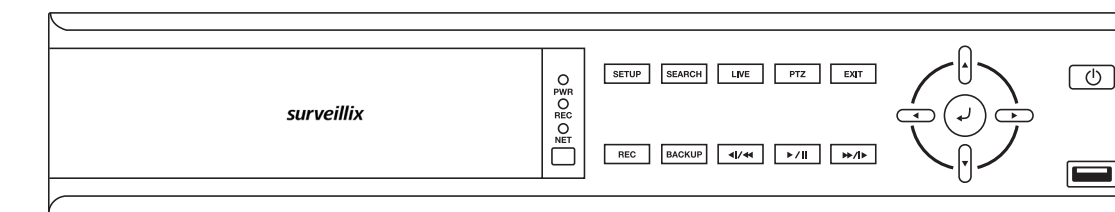


### 16 Channel





### LOGGING IN FOR THE FIRST TIME

<b>DVR</b>	User ID: admin	<b>Remote Software</b>	User ID: admin
	Password: 1234		Password: 1234
	<b>Note</b>	After logging in for the first time, change the admin password for the recorder and remote software to establish user level security. See the Manual for instructions.	

### LED STATUS INDICATOR

	<b>Power</b>	Illuminates when power is supplied to the recorder.
	<b>Record</b>	Illuminates when video is being recorded.
	<b>Network</b>	Illuminates when the recorder is connected to a network.

### ENTER / EXIT BUTTONS

	<b>Enter</b>	Input data and make selections.
	<b>Exit</b>	Return to the previous mode or menu, without saving.

## QUICK START GUIDE

## DIRECTIONAL AND PLAYBACK CONTROL BUTTONS

Operation Modes: Live Mode, Live Freeze Mode, Search Mode, Search-Pause Mode, Navigation Mode, and PTZ Mode.



**Search** Start reverse playback of recordings. Press successively to change the fast reverse speed.



**Replay** Start playback of the most recent recording.  
**Search** Press to Pause or Play in Search mode.



**Search** Start playback of recordings. Press successively to change the fast forward speed.



**Navigation** Move up.  
**PTZ** Move the camera view point up.



**Navigation** Move to the right.  
**PTZ** Move the camera view point to the right.  
**Search** Play recorded videos. When pressed successively, the search jumps forward in time by 30 minute increments.  
**Search-Pause** Step forward one frame.



**Navigation** Move down.  
**PTZ** Move the camera view point down.



**Navigation** Move to the left.  
**PTZ** Move camera's view point to the left.  
**Search** Play recorded videos in reverse. When pressed successively, the search jumps back in time by 30 minute increments.  
**Search-Pause** Step backwards.

## FUNCTION BUTTONS



**Setup** Open the setup menu.



**Search** Open the search menu.



**Live** Change the display mode. Display switches in the following order when the LIVE key is pressed successively:  
(Single > 4 > 9 > 16 > Single > 4 > 9 > etc).



**PTZ** In live view, press to enter PTZ mode.




**Exit** Exit current menu / function.



**Record** Start Emergency Recording when viewing live video.



**Backup** In live mode, press to open the backup menu.  
In the search mode,  
• Press once, to set the start time for Backup.  
• Press twice, to set the end time for Backup.  
• Press three times, to complete Backup.

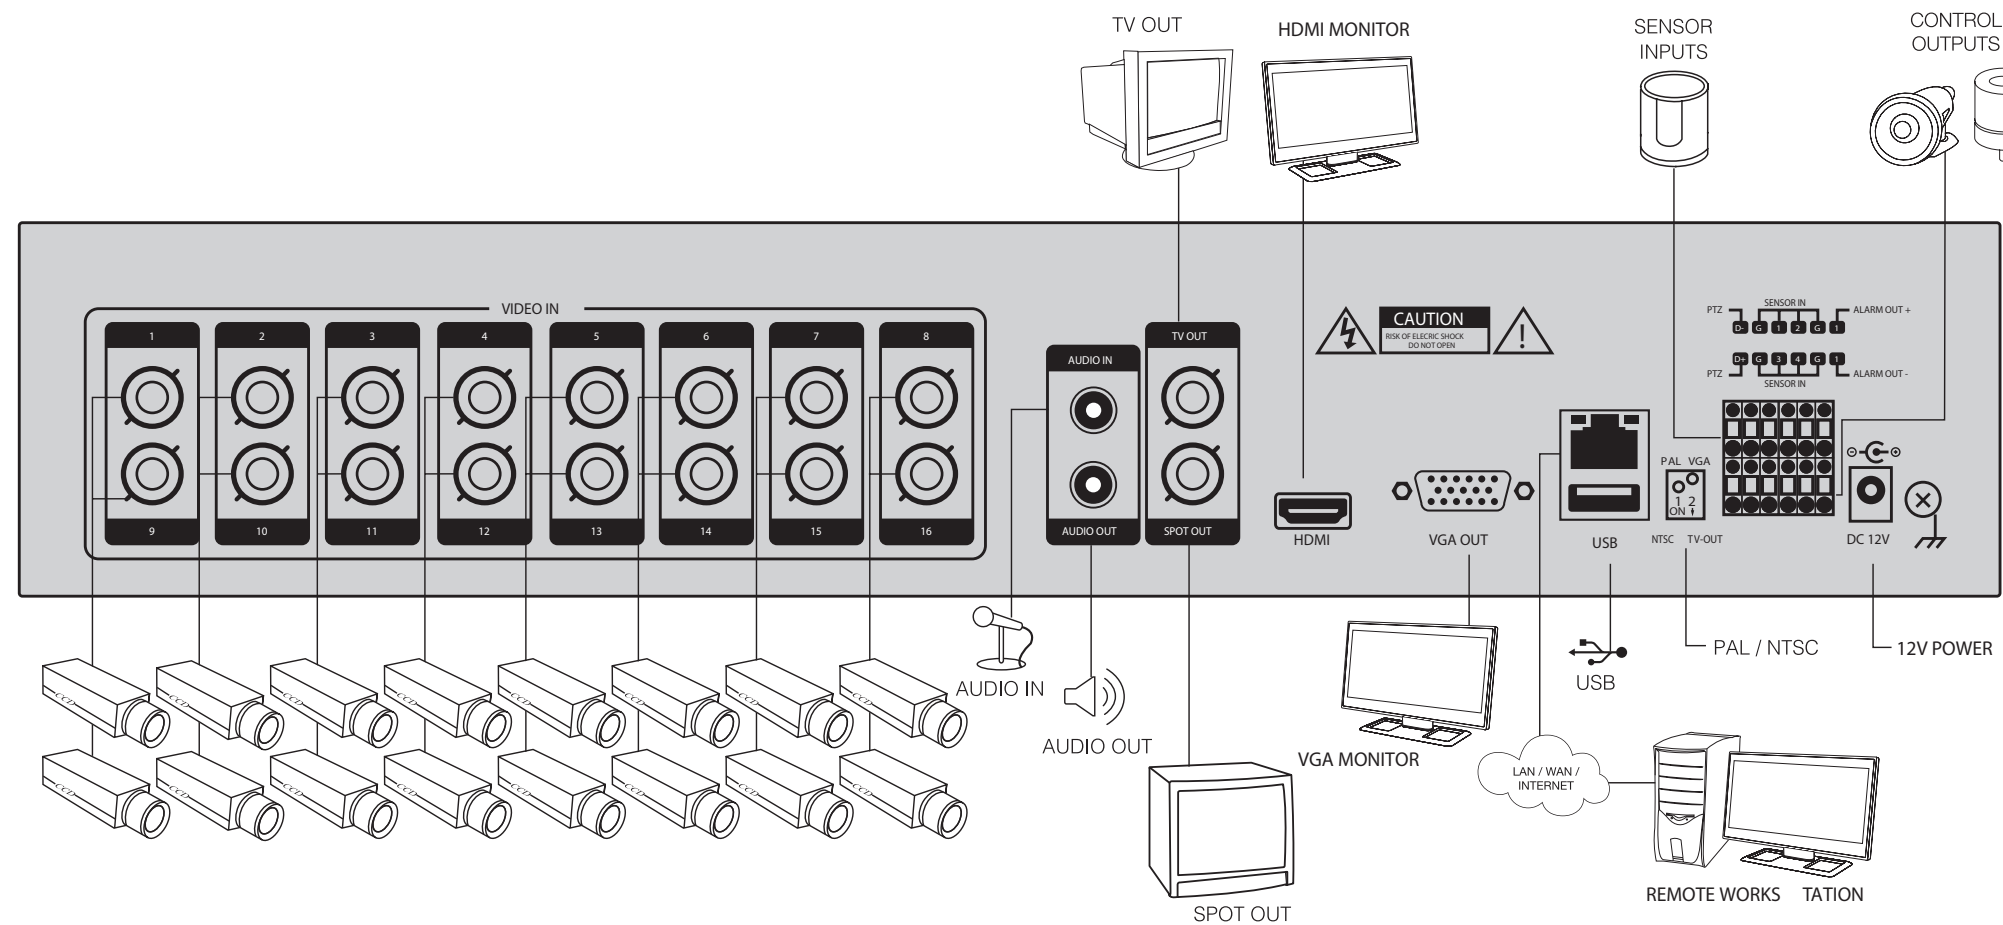

## QUICK INSTALLATION

1. Connect cameras to video inputs, and if using, connect PTZ camera control lines to RS485 connector.
2. Connect the main monitor to the HDMI, VGA, or MAIN (BNC) video outputs.
3. Connect the monitor to SPOT video output. (optional)
4. Connect sensors to alarm signal inputs. (optional)
5. Connect alarm devices such as buzzers to alarm signal outputs. (optional)
6. Connect external controllers to RS485 connector. (optional)
7. Connect a speaker and microphone to the audio input. (optional)
8. Connect a network cable to the network port.
9. Power on all the connected equipment.
10. Connect the power cord to the recorder.