



8-Port Gigabit GREENnet PoE+ Switch TPE-TG80g (v1.0R)

TRENDnet's 8-Port Gigabit GREENnet PoE+ Switch, model TPE-TG80g, reduces equipment and installation costs by delivering data and power over existing Ethernet cables. This unmanaged switch offers eight Gigabit PoE+ ports which supply up to 30 watts of power per port for devices such as high power wireless access points, PTZ (Pan / Tilt / Zoom) internet cameras, and VoIP telephony systems.

Auto sensing technology delivers 30 watts to 802.3at PoE+ devices (up to 3 devices), 15 watts to 802.3af PoE devices, and only data to non-PoE devices. GREENnet technology reduces energy consumption by up to 75% when the switch is not in use. Boost office efficiency and reduce network congestion with a total switching capacity of 16 Gbps. LED indicators display device status for efficient troubleshooting. This switch comes in a sturdy metal case and quickly adds PoE+, PoE, and non-PoE devices to your network.

PRODUCT OVERVIEW

- 8 x Gigabit PoE+ ports (up to 30 watts per PoE+ port)
- Up to 30 W per port with 105 W total power budget
- Reduces equipment cost by delivering data and power over existing network cables
- 16 Gbps switching capacity
- Sturdy metal case
- Up to 75% GREENnet power savings



FEATURES

- IEEE 802.3at and IEEE 802.3af Power over Ethernet (PoE) compliant
- Supports PoE Class 2 (7 watts) , 3 (15.4 watts), and 4 (30 watts)
- 8 x Gigabit Auto-MDIX PoE / PoE+ ports
- Provides up to 30 watts for PoE+
- Provides up to 15.4 watts for PoE
- Automatically detects the PoE class level of a Powered Device
- 16 Gbps switching fabric
- Forwarding Rate: 1000 Mbps (1,488,000 pps), 100 Mbps (148,800 pps), 10 Mbps (14,880 pps)
- Status LEDs: System Power, PoE, 1000 Mbps, and Link/Activity
- 1K Mac address entries
- 96 Kbyte memory buffer
- Full wire-speed non-blocking reception and transmission
- Store-and-forward switching method
- Back pressure Flow Control for Half-Duplex mode
- IEEE 802.3x Flow Control for Full-Duplex mode
- Power saving technology powers down unused ports and when a connected device is in standby mode
- Jumbo Frame support up to 9K
- Plug and Play
- Sturdy metal case
- 3-year limited warranty

8-Port Gigabit GREENnet PoE+ Switch

TPE-TG80g (v1.0R)



SPECIFICATIONS

HARDWARE

Standard	• IEEE 802.3 10Base-T • IEEE 802.3u 100Base-TX • IEEE 802.3ab 1000Base-T • IEEE 802.3at Power over Ethernet (PoE+) • IEEE 802.3af Power over Ethernet (PoE) • IEEE 802.3X Flow Control • IEEE 802.3az Energy Efficient Ethernet
Ports	• 8 x Gigabit Auto-MDIX PoE / PoE+ ports
Data Transfer Rate	• Ethernet: 10/20 Mbps (Half / Full Duplex) • Fast Ethernet: 100/200 Mbps (Half / Full Duplex) • Gigabit: 2000 Mbps (Full Duplex)
Forwarding Rate	• 1,000 Mbps: 1,488,000 pps • 100 Mbps: 148,800 pps • 10 Mbps: 14,880 pps
Data RAM Buffer	• 96 Kbytes
Address Table	• 1K MAC entries
Switch Fabric	• 16 Gbps
Power	• Input: 100-240V 50/60 Hz, 2.1A • Output: 52VDC, 2.31A External Power Adapter
Diagnostic LEDs	• Power, PoE, 1000 Mbps, Link/Activity
Power Consumption	• Min: 5 watts (standby) • Max: 120 watts • PoE Max: 105 watts • (7 x 15 watts PoE devices connected or 3 x 30 watts PoE+ devices connected)
Temperature	• Operating: 0° ~ 40°C (32° ~ 104°F) • Storage: -20° ~ 90°C (-4° ~ 194°F)
Humidity	• Max 90% (non-condensing)
Dimensions	• 142 x 95 x 30 mm (5.6 x 3.7 x 1.2 in.)
Weight	• 400 g (14 oz.)
Certifications	• CE, FCC

POE


Power over Ethernet	• Up to 15.4 watts for PoE • Up to 30 watts for PoE+ • PoE: pin 3, 6 for power+ and pin 1, 2 for power- (mode A)
----------------------------	--

8-Port Gigabit GREENnet PoE+ Switch

TPE-TG80g (v1.0R)



NETWORKING SOLUTIONS

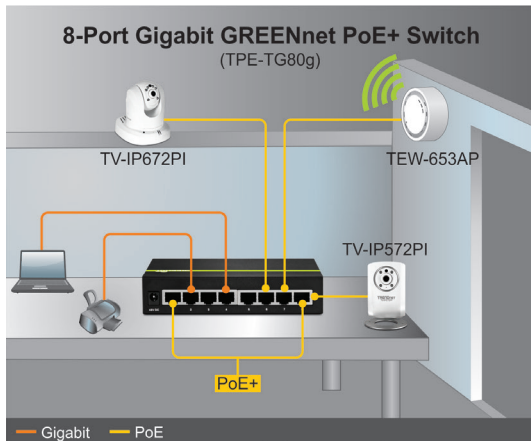

PACKAGE CONTENTS

TPE-TG80g
Quick Installation Guide
Power Adapter (52V DC, 2.31A)

RELATED PRODUCTS

TPE-T88G	16-Port GREENnet 10/100 Mbps PoE+ Switch
TPE-114GS	Gigabit Power over Ethernet (PoE) Splitter
TPE-TG44G	8-Port Gigabit GREENnet PoE+ Switch

CONTACT INFORMATION

TRENDnet

20675 Manhattan Place, Torrance, CA 90501 USA
Tel: 1-310-961-5500
Fax: 1-310-961-5511
Web: www.trendnet.com
Email: sales@trendnet.com
1-888-326-6061

